


>> Interactive Multifunctional Display



>> Optional auto water-filling battery (Optional)



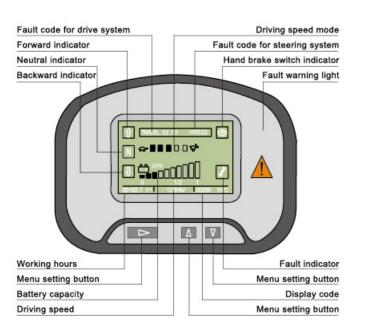



>> Energy regeneration

 Energy regeneration with AC technology control for the energy-saving, the single shift working time of the battery is increased by 15%




• Reliable multifunctional display showing working condition, fault detection information for more direct and convenient reading.

Ite	em	unit G series 1-5t AC Electric Platform Truck					
1 T	ruck Model		BD10-JB1	BD20-JA1	BD20-JB1	BD40-JA1	BD50-JA1
2 0	perating mode				Seated		
3 C	Capacity	t	1	2	2	4	5
4 W	Vheelbase	mm	1150	1650	1650	1810	2100
5 W	Veight	kg	880	1500	1500	2200	2400
6 fr	ont-rear tires load without load	kg	440/440	800/700	800/700	1000/1200	1150/1250
7	Туре		Pneumatic tires				
8 T	ires Front tire		5.00-8	6.50-10	6.50-10	7.00-12	7.00-12
9	Rear tire		5.00-8	6.50-10	6.50-10	7.00-12	7.00-12
0 S	eat height(front ground)	mm	735	860	860	980	980
1 T	raction base height	mm	450 (Optional)	580 (Optional)	580 (Optional)	720(Optional)	720(Optional)
2 T	ruck dimension(length*width*height)	mm	2750×1000×1250	3615×1400×1400	3615×1400×1400	3970×1500×1400	4575×1500×1550
3 P	flatform dimension(length*width*height)	mm	1400×1000×560	2240×1400×680	2240×1400×680	2600×1500×850	3200×1500×850
4 M	fin. Ground clearance	mm	80	130	130	130	130
5 T	urning radius	mm	3000	3500	4300	4400	4800
6 D	Priving speed(with/without load)	km/h	8.0/10.0	12.0/16.0	12.0/16.0	12.0/16.0	12.0/15.0
7 G	Gradeability(with load)	%xm	10%x20m	10%x20m	10%x20m	10%x20m	8%x20m
8 D	Priving brake		Hydraulic brake and electric brake				
9 P	arking brake	Mechanic					
0 D	Priving mode				Rear drive		
1 D	rive motor rated power	kW	3	4	4	6	6
2 S	teering motor rated power	kW	1	1.35	1	1.35	1.35
3 B	attery/rated capacity(5H)	V/Ah	24/280	48/280	48/280	48/350	48/450
4 B	attery weight	kg	300	550	550	579	715
5 T	read, front tire	mm	790	1160		125	0
6 T	read, rear tire	mm	820	1160		125	0
7 D	Priving control mode		Electronic stepless mode				
8 0	perator's ear noise	db(A)	A) <65				
9 C	Controller type		CURTIS AC controller				

Standard configuration		Optional configuration		
Streamlined glass fiber cover	Took kits	Cabin	Different height traction pin	
Battery		Platform guard bar	Solid tire	
Liquid crystal combination display		Beacon	Simple rain cover	
Pneumatic tires		Crate	Optional paint color	
Traction pin		Optional dimension platform		

© 2013 heli copyright

Catalog No.2013-07-C HELI Print

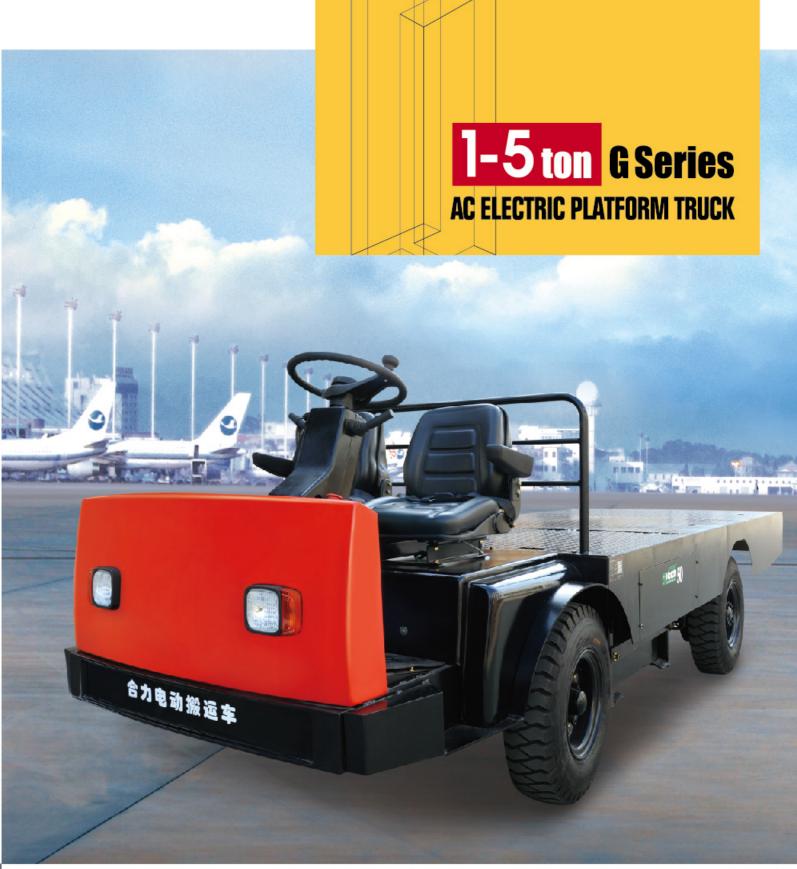

ANHUI HELI CO., LTD.

ADD: NO.668 Fang Xing Street, Economic And Development Zone Anhui P.R.China TEL: (0086) 551-63689667,63689674,63689676 FAX: (0086) 551-63689558-247 (0086) 551-63689674 E-MAIL: helizzj@helichina.com WEBSITE: www.helichina.com



By China Chamber of Commerce for Import and Export of Machinery And Electric Products







>> Brief Introduction

As the newly designed environmentally friendly tractor machines, HELI G series 1-5T AC Electric Platform Truck has the unique profiling, ergonomically and aesthetic philosophy combination for operator comfort and ease of use, maintenance convenience.

This machine is powered by battery, with World-famous Curtis AC controller matched AC motors to supply the stepless accelerating, high efficiency, reliable quality, comfortable operation, and strong power.




Drive system

- Special drive axle for electric machines with low noise, non-pollution, stable running, perfect sealing, and also with enough ground clearance for good trafficability.
- Large gear ratio, powerful traction, strong gradeability, perfect performance, suitable for complex operating condition.

Steering system

- With fully-hydraulic Transverse cylinder power steering or circulating ball type redirector, easily steering, and long working life.
- Front and rear suspension are with elastic connection for more comfort.

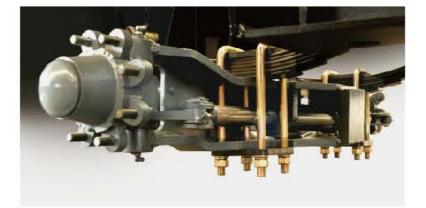



Superior intelligent design

· Intelligent components and function for the better safety to driver and machines, also supply the higher working efficiency, and reduce the energy-consumption.



Operating system

- Comfortable brake/accelerating pedal position with light stepping strength, fully meeting ergonomically
- demands.
- With front-rear adjustable steering wheel to satisfy different height drivers. With excellent cold-brake efficiency, enough brake force, fully meet the parking and driving brake standard.

Chassis system

• Side-extraction battery replace, very convenient and reliable.







