

HELI
LIFTING THE FUTURE

25 YEARS


TOP1 FORKLIFT MANUFACTURER AND SALER
IN CHINA FOR CONSECUTIVE 25 YEARS

CDD16

1.6 Ton Counterbalanced Electric Stacker

Lifting Height: 1400-4500mm

Load Curve



Advantages

Configuration and Performance

- ⊙ Electronic power steering system, light and low noise.
- ⊙ Two-way magnetic valve, three drop speed mode.
- ⊙ AC Driving system, No carbon brush, maintenance free.
- ⊙ USA CURTIS driving controller.
- ⊙ Electromagnetic, regenerative braking system.
- ⊙ Automatic lifting limit, proximity switch, long life.

Safety

- ⊙ Curve automatic deceleration devices, more safe.
- ⊙ Vehicle decelerates automatically at higher position.
- ⊙ Stepless speed control system, safe and quiet.
- ⊙ Controller with Multiple automatic protection.
- ⊙ Emergency reversing device/Emergency brake switch.
- ⊙ High position automatic reduction device.

AC | EPS

Free-maintained battery

Options fork tilt device

Counter-balanced electric stacker




Type	Lift height (mm)	Mast type	Option
CDD16-D970	1400/2000/2500/3000/3300/3600/4000	Standard 2-STAGE	TILTING DEVICE
CDD16-970	3700/3900/4200/4500	FULL FREE 3-STAGE	TILTING DEVICE

HELI CDD16

Feature			
Model		CDD16	CDD16
Configuration No.		D970	970
Type		Counterbalanced	
Mast type		Standard 2-Stage	Full free 3-Stage
Load capacity	kg	1600	1600
Load center	mm	500	500
Wheel base	mm	1529	1529
Operating type		Walkie/Stand On	
Wheels			
Wheels type		PU	PU
Wheel quantity, Driving wheel/ Balance wheel/Bearing wheel		1/0/2	1/0/2
Dimension			
Standard lift height	mm	1400/2000/2500/3000/ 3300/3600/4000	3700/3900/4200/4500
Lowered fork height	mm	55	55
Fork size(length/width/thickness)	mm	1070/100/40	1070/100/40
Overall length	mm	2942/3362	2942/3362
Overall width	mm	1015	1015
Max.extend height	mm	2400/3000/3500/4000 4300/4600/5000	4350/4550/4650/5150
Mast lowered height	mm	1230/1580/1760/2030 2230/2530/2545	1817/1917/2002/2102
Min.Turning radius	mm	1808/2200	1808/2200
Min.Aisle width for pallets 800×1200	mm	3140/3520	3140/3520
Min.Aisle width for pallets 1000×1200	mm	3160/3538	3160/3538
Min.ground clearance	mm	80	80
Performance			
Travel speed,laden/unladen	km/h	5/5	5/5
Lift speed,laden/unladen	mm/s	130/180	130/180
Lowering speed,laden/unladen	mm/s	100/230	100/230
Gradeability,laden/unladen	%	5/7	5/7
Electrical configuration			
Drive motor/Lift motor/Steering motor	kW	AC1.5/DC3/DC0.15	AC1.5/DC3/DC0.15
Battery voltage	V	24	24
Battery capacity	Ah	270	270
Brake		Electromagnetic/Regenerative	
Controller		CURTIS	
Weight			
Battery weight	kg	245	245
Service weight with battery	kg	1900	2010

* Details of specifications and equipment are based on information available at time of printing and may change without notice.

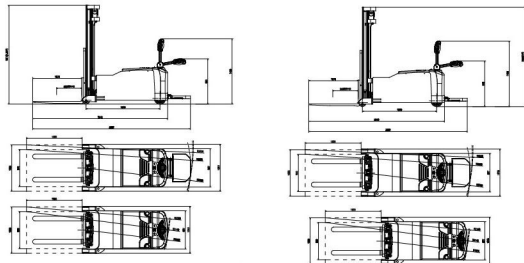

ANHUI HELI CO., LTD.

ADD: NO.668 Fangxing Street,Economic Development Zone,Hefei,P.R.China

TEL : (86 551)63639068,63639258,63639358,63662105,63639530

FAX : (86 551)63639966

WEBSITE : <http://www.helichina.net>

Email : hel@helichina.net

AUTHORIZED DEALER